


HVAC CONTROL

RoHS CE

FTPT02-020I_121001

Series KLT11DS

Thermostat KLT11DS




FEATURES:

- Cooling or heating control.
- Depth 33 mm that allows using at small places.
- One input probe.
- Probe type NTC or PTC selectable by parameter.
- Output to one SPDT relay.
- Static defrosting.
- Temperature limit on display during defrosting.
- Error indication and fault function: 50 % cycle.
- Connections by terminal blocks or faston.

HOW TO ORDER:

MODELS: KLT11DS-FR230C



Options: Ask to factory

AVAILABLE MODELS:

- KLT11DS-R230C
- KLT11DS-R110C
- KLT11DS-FR230C
- KLT11DS-FR110C

SPECIFICATIONS:

Panel Mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

Power Supply

230Vac±10%, 115Vac±10%

Dimensions

77 x 36 x 33 mm (3.03 x 1.42 x 1.30 inch)

Measurement range

PTC -50°C to 150°C (-58 a 302°F)
NTC -50°C to 110°C (-58 a 230°F)

Accuracy

Better than 1% of full scale

Resolution

0,1° (3 digits)

Probe

PTC (1000 Ohms, 25°C) / NTC

Output


SPDT Relay Resistive load 16A
1HP 240Vac -- 10FLA, 60LRA 240Vac

IP Protection

Front: IP64

Rear: IP20

WIRING CONNECTIONS:

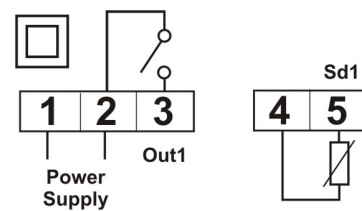

KELD



HEADQUARTERS

Polígono Empresarium. C/Lentisco, 15.
50720 La Cartuja Baja. Zaragoza. (Spain)

Tel: +34 976 429 099 · Fax: +34 976 593532

E-mail: keld@keld.es · web: www.keld.es

GPS: N 41.5863 W 0.82531