

HVAC CONTROL

RoHS  CE

FTPT02-0181_121001

Series KLT22Z


Dual Stage Thermostat KLT22Z



FEATURES:

- Thermostat with two input probes and two output relays.
- Two stages or neutral zone selection.
- Heat or cool control for each relay.
- Internal buzzer.
- Working with 1 or 2 probes.
- RS485 Communication.
- Easy access to parameters by code.
- Input for parameter-programming device KLKEY.

HOW TO ORDER:

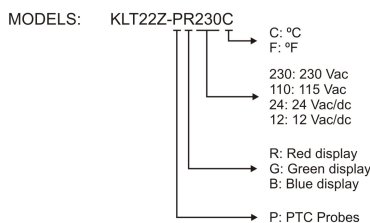

Options: Ask to factory
Communication by external mini-module KLRS485A

AVAILABLE MODELS:

- KLT22Z-PR230C
- KLT22Z-PR110C
- KLT22Z-PR12C

SPECIFICATIONS:

Panel Mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

Dimensions

Front: 76,5 x 36 mm (3.01 x 1.41 inch)

Depth: 62 mm (2.44 inch)

Operating Temperature

-50°C to 150°C / -58°F to 302°F

Accuracy

Better than 1% of full scale

Resolution

0,1°

Probe

2 PTC (1000 Ohms, 25°C) probes

Outputs

OUT1: SPDT Relay Resistive load 16A


1HP 240Vac -- 10FLA, 60LRA 240Vac

OUT2: SPDT Relay Resistive load 240 Vac 8A

IP Protection

Front: IP64 Rear: IP20

WIRING CONNECTIONS:

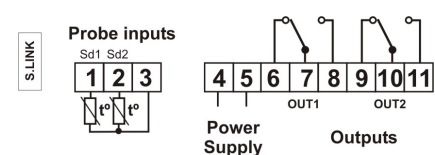

KELD



HEADQUARTERS

Polígono Empresarium. C/Lentisco, 15.
50720 La Cartuja Baja. Zaragoza. (Spain)

Tel: +34 976 429 099 · Fax: +34 976 593532

E-mail: keld@keld.es · web: www.keld.es

GPS: N 41.5863 W 0.82531