FTPT07-001I_121016

Timer Controller

KLTIMER

RoHS c UL us CE



PROGRAMMABLE TIMER
Relay output
TIME CONTROL

IP64
Front protection
PROTECTION

115 / 230 VAC
24 VAC/dc, 12 VAC/dc
POWER SUPPLY

CORE FEATURES

- Programmable timer controller
- Remote countdown input
- Manual ON/OFF output control
- Audible warning at end of countdown
- Time unit selectable in minutes or seconds

3-digit display
Red / Green / Blue, depending on model

TIME FUNCTIONS

- Time Resolution: 1 second
- Maximum Interval: programmable
- Time Unit: minutes / seconds

POWER CONSUMPTION


- 4 VA (230 Vac)

TECHNICAL SPECIFICATIONS


KLT11TIM-R230	**KLT11TIM-R110**
red display, 230 Vac	red display, 115 Vac

Dimensions	77 × 36 × 62 mm (3.03 × 1.42 × 2.44 in)
IP Protection	Front IP64 / Back IP20
Operating Temp.	0°C to 70°C (32 to 158°F)
Storage Temp.	-20°C to 80°C (-4 to 176°F)
Accuracy	Not applicable
Resolution	1 second
Probe Input	Not applicable

WIRING CONNECTIONS

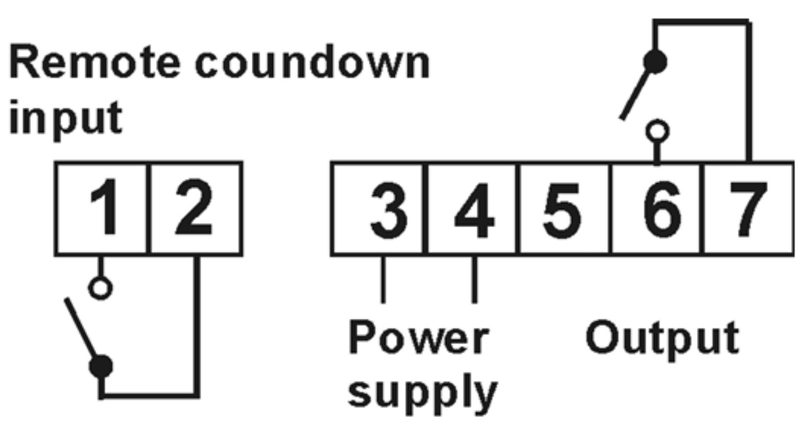

HOW TO ORDER

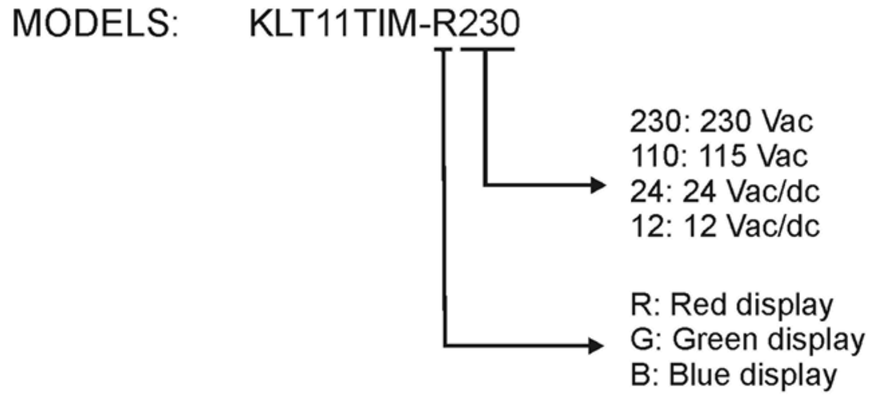

Options: Ask to factory

Polígono Empresarium · C/Lentisco, 15 · 50720 La Cartuja Baja · Zaragoza (Spain)
+34 976 429 099 · keld@keld.es
www.keld.es